

Submersible Freshwater Pump Range

Higher Flow Rates and Greater Life

Compact, quiet, lightweight design suitable for use with pressure switch and microswitch systems. Ideal for use pumping from external water containers.

Standard Pump 10 ltrs/min - GP1002

- Simple, compact and an economical solution
- Ideal for basic, one outlet applications

Premium Pump 13 ltrs/min - GP1352


- Reliable, general purpose and suitable for multiple outlets
- Long life, very quiet with low power consumption
- An inexpensive way to update a manual to an electric system

HighFlow Pump 16 ltrs/min - GP1652

- Market leading submersible pump for flow performance suitable for showering

i Product Information

1 Year Warranty

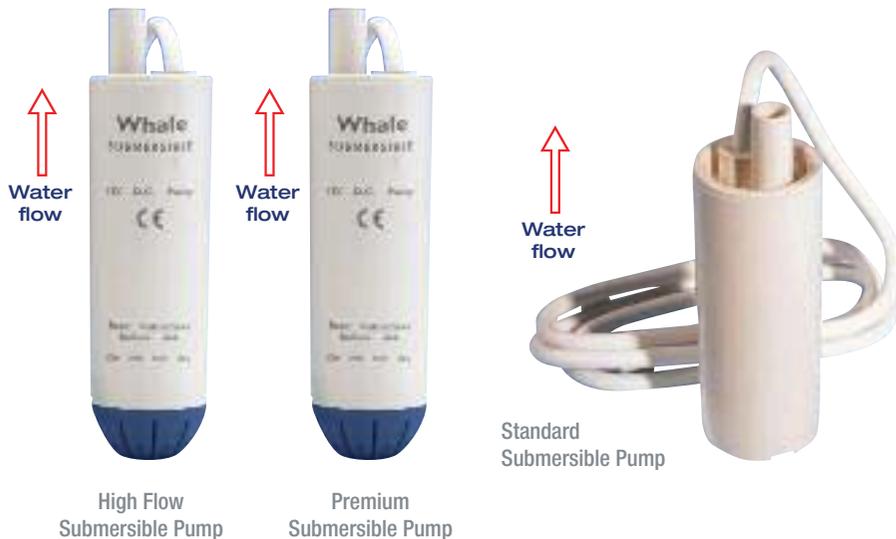

i Product Information

Model Specifications

Model	Standard	Premium	High Flow	
Voltage	12V d.c.	12V d.c.	24V d.c.	12V d.c.
Pump	Sub	Sub	Sub	Sub
Submersible Pump Old Model	GP8015	GP8815	GP8825	GP1652
Submersible Pump New Model	GP1002	GP1352	GP1354	GP1652
Fuse Size	5 amp automotive		5 amp automotive	3 amp automotive
Weight	0.15kg (0.3 lbs)			
Connection to Flexible Hose	10 mm bore hose	Suits 10 mm or 13 mm Bore Hose		
Connection to 12 mm Quick Connect Plumbing	WU1211 (Stem Adaptor 11mm - 12 mm) see page 59			
Materials in Contact with Liquid	Pump Body: ABS, Seals: Nitrile®, Strainer: Polypropylene, Impeller: Stainless Steel			

Please note: New model codes are direct replacements for old model codes


Please note: Pump performance may vary depending on the plumbing system and restrictions on outlets in your caravan/motorhome.

Performance Data

Flow Rate Per Minute / Current Draw

Model	Standard 12V d.c.	12V d.c.	Premium	24V d.c.	High Flow 12V d.c.
Discharge Head	GP1002	GP1352	GP1354	GP1652	GP1652
0 m (0ft)	10.3 ltrs 2.4 amps	13.2 ltrs 3.6 amps	13.2 ltrs 1.8 amps	15.8 ltrs 3.8 amps	15.8 ltrs 3.8 amps
1 m (3ft)	8.75 ltrs 2.2 amps	11.75 ltrs 3.3 amps	11.75 ltrs 1.6 amps	14.8 ltrs 3.7 amps	14.8 ltrs 3.7 amps
3 m (9ft)	5.75 ltrs 2.0 amps	9.75 ltrs 2.9 amps	9.75 ltrs 1.45 amps	12.8 ltrs 3.5 amps	12.8 ltrs 3.5 amps

Please note: Pump performance may vary depending on the plumbing system and restrictions on outlets in your caravan/motorhome.

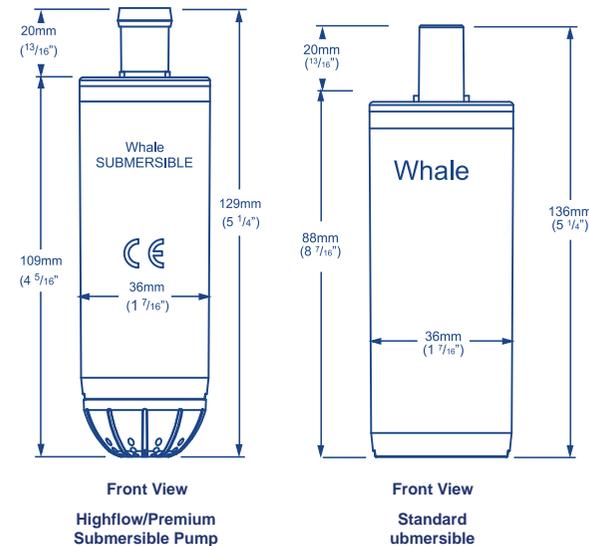

For best performance:

- Maximum continuous operation should not exceed 15 minutes
- Do not run pump dry as it will cause pump damage
- Do not use to pump water that is over 60oc
- We recommend the pump stands vertically in the tank
- Before switching on, place the pump in water and shake for a few seconds to release trapped air. This will ensure successful priming and should be repeated after refilling the water tank
- Add an in-line pump into a system to boost water flow (see page 48)

Tips